Top Assembly Part 2

You're almost done! We finish off the quilt top this month.

Sashing/Border

First we need to make the sashing strips. These strips are made up of your scraps from each of the blocks you made. The scrap must be at least 2 inches wide. Sew random lengths (between 2 1/2 inches and 4 1/2 inches) of scraps together. You will need four of these strips, two 24 1/2 inches and two 27 1/2 inches.

Sew one 24 1/2 inch strip to the left and right side of the center medalillon.




Sew one 27 1/2 inch strip to the top and bottom of the center medalillon.





The out side border is made in the same manner but the strips are 2 1/2 inches wide. You will need to measure your quilt to get the length you will need.

Assembly



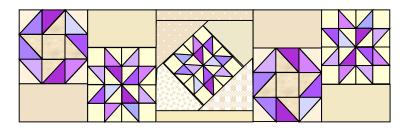

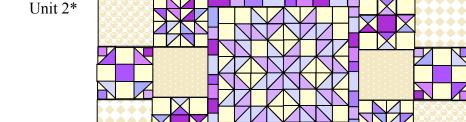

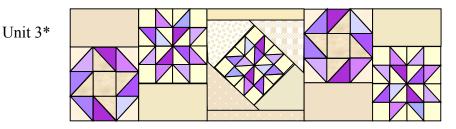

^{*} for purposes of the drawing I repeated the blocks. You will use your units which use all of the different blocks. (I'm just too lazy to draw them all up)

Sew Unit 1 to Unit 2 and then add Unit 3,

Measure the quilt to find the length of each border (remember to use the average width and the average length.

In a perfect world your top would be 63 1/2 inches square. So you would cut two strips 63 1/2 inches for the sides and two 67 1/2 inches for the top and bottom.

